

36 607 660 Produktversion ab 01.04.2024




- Rosette Ø 60 mm
- Oberteil mit ablängbarer Spindel und Hülse

	Platin gebürstet	36 607 660-06
	Chrom	36 607 660-00
	Dark Chrome	36 607 660-19
	Light Gold	36 607 660-26
	Light Gold gebürstet	36 607 660-27
	Schwarz matt	36 607 660-33
	Bronze gebürstet	36 607 660-42
	Champagne gebürstet (22kt Gold)	36 607 660-46
	Champagne (22kt Gold)	36 607 660-47
	Chrom gebürstet	36 607 660-93
	Dark Platinum gebürstet	36 607 660-99

Benötigtes Zubehör

- | | |
|--------------------------|---------------|
| UP-Ventil 1/2" - | 35 607 970 90 |
| •Min. Einbautiefe 75 mm | |
| •Max. Einbautiefe 145 mm | |



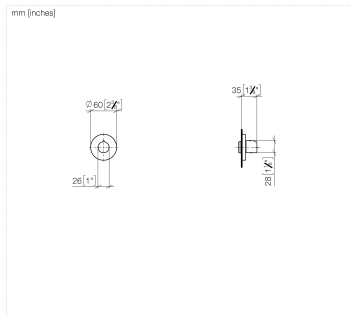

Codes & Standards


DIN 4109

ISO 3822

Ü-Zeichen

Zertifikate

LGA_38

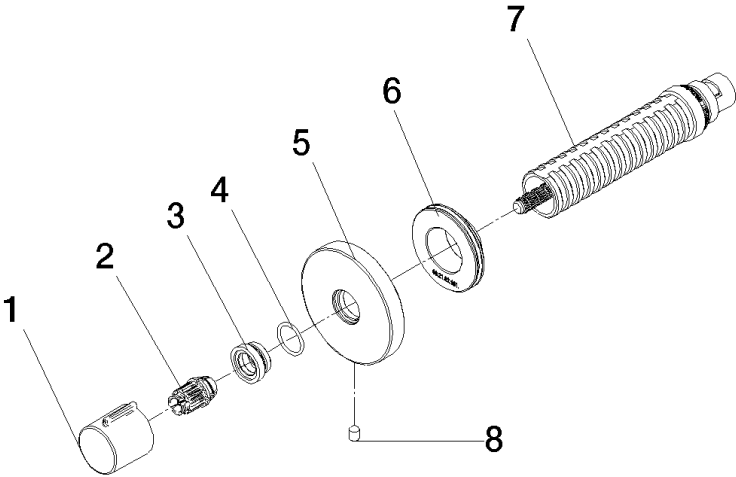

Ersatzteilstückliste

Nr.	Artikelnummer	Benennung	Verbaumenge	Lieferzeit
4	09 14 10 017 90	O-Ring EPDM 70 14,0 x 1,5 mm -	1,00	2
1	09 20 98 001-06	Griff mit Nase Ø 25 x 25 mm - Platin gebürstet	1,00	10
2	09 12 12 005 90	Rastbuchse weiß Ø 14,5 x 18,5 mm -	1,00	2
7	90 90 03 202 00 90	Oberteil , linksschließend ungebremst 1/2" -	1,00	2
3	09 12 12 043-06	Rastbuchsenaufnahme Ø 19,5 x 9,5 mm - Platin gebürstet	1,00	10
5	90 27 67 021 94-06	Rosette für xTOOL rund Ø 60 x 9 mm - Platin gebürstet	1,00	10
6	09 21 02 151 90	Haube Ø 43 x 13 mm -	1,00	2
8	09 31 11 004 90	Befestigung Gewindestift mit Innensechskant M5 x 8 mm	1,00	-
Ersatzteil nicht mehr bestellbar, bitte bestellen Sie den Nachfolgeartikel				
0431110040090		Befestigung -		