

Model

HM143HF UB60 / HN1639HC NK0



Seasonal space heating energy efficiency of heat pump

%

Temperature control

From fiche of temperature control

Class I = 1 %, Class II = 2 %, Class III = 1,5 %,
Class IV = 2 %, Class V = 3 %, Class VI = 4 %,
Class VII = 3,5 %, Class VIII = 5 %

+ %

Supplementary boiler

From fiche of boiler

Seasonal space heating energy efficiency (in %)

(- 'I') × 'II' = - %

Solar contribution

From fiche of solar device

Collector size
(in m²)

Tank volume
(in m³)

Collector efficiency
(in %)


Tank rating
A* = 0,95, A = 0,91,
B = 0,86, C = 0,83,
D-G = 0,81

('III' × + 'IV' ×) × 0,45 × (/100) × = + %

Seasonal space heating energy efficiency of package under average climate

%

Seasonal space heating energy efficiency class of package under average climate

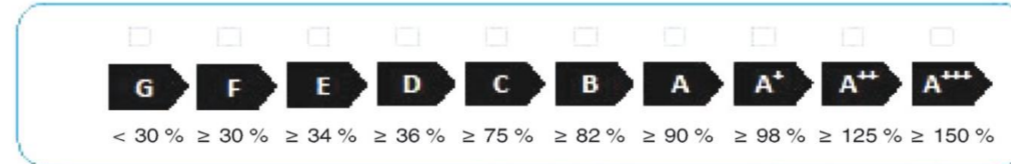

Seasonal space heating energy efficiency under colder and warmer climate conditions

Colder: - 'V' = %

Warmer: + 'VI' = %

The energy efficiency of the package of products provided for in this fiche may not correspond to its actual energy efficiency once installed in a building, as the efficiency is influenced by further factors such as heat loss in the distribution system and the dimensioning of the products in relation to building size and characteristics.

	I	II	III	IV	V	VI
55°C	155%	0.00	2.43	0.95	30%	36%
35°C	212%	0.00	2.43	0.95	60%	39%

Model

HM143HF UB60 / PHCS0 ENCXLEU



Seasonal space heating energy efficiency of heat pump

%

Temperature control
From fiche of temperature control

Class I = 1 %, Class II = 2 %, Class III = 1,5 %,
Class IV = 2 %, Class V = 3 %, Class VI = 4 %, Class VII = 3,5 %, Class VIII = 5 %

+ %

Supplementary boiler
From fiche of boiler

Seasonal space heating energy efficiency (in %)

(- 'I') × 'II' = - %

Solar contribution
From fiche of solar device

Collector size (in m²)

Tank volume (in m³)

Collector efficiency (in %)


Tank rating
A* = 0,95, A = 0,91,
B = 0,86, C = 0,83,
D-G = 0,81

('III' × + 'IV' ×) × 0,45 × (/100) × = + %

Seasonal space heating energy efficiency of package under average climate

%

Seasonal space heating energy efficiency class of package under average climate



Seasonal space heating energy efficiency under colder and warmer climate conditions

Colder: - 'V' = %

Warmer: + 'VI' = %

The energy efficiency of the package of products provided for in this fiche may not correspond to its actual energy efficiency once installed in a building, as the efficiency is influenced by further factors such as heat loss in the distribution system and the dimensioning of the products in relation to building size and characteristics.

	I	II	III	IV	V	VI
55°C	155%	0.00	2.43	0.95	30%	36%
35°C	212%	0.00	2.43	0.95	60%	39%