

WAGO I/O System 750/753

16-channel digital input; 24 VDC; 3 ms; high-side switching

750-1405



© 2025 WAGO GmbH & Co. KG
All rights reserved.

WAGO GmbH & Co. KG

Hansastraße 27
D - 32423 Minden

Phone: +49 571/887 – 0
E-Mail: ✉ info@wago.com
Internet: 🌐 www.wago.com

Technical Support

Phone: +49 571/887 – 44555
E-Mail: ✉ support@wago.com
Internet: 🌐 www.wago.com/support

Every conceivable measure has been taken to ensure the accuracy and completeness of this documentation. However, as errors can never be fully excluded, we always appreciate any information or suggestions for improving the documentation.

E-Mail: ✉ documentation@wago.com

We wish to point out that the software and hardware terms as well as the trademarks of companies used and/or mentioned in the present manual are generally protected by trademark or patent.

WAGO is a registered trademark of WAGO Verwaltungsgesellschaft mbH.

Table of Contents

- 1 Provisions..... 4**
 - 1.1 Scope of Applicability 4
- 2 Overview..... 5**
- 3 Properties..... 6**
 - 3.1 View..... 6
 - 3.2 Indicators..... 7
 - 3.3 Wiring Interface..... 8
 - 3.4 Power Jumper Contacts..... 9
 - 3.5 Circuit Diagram..... 10
- 4 Functions 11**
 - 4.1 Signal Processing..... 11
 - 4.2 Process Image 11
- 5 Planning 12**
 - 5.1 Compatibility..... 12
 - 5.2 Requirements for Wiring and Accessories 12
 - 5.3 Connection Example 12
- 6 Appendix 13**
 - 6.1 Technical Data, Approvals, Guidelines and Standards..... 13
 - 6.1.1 Data sheet 750-1405..... 14

1 Provisions

1.1 Scope of Applicability

This document applies to the following product:

🔗 **750-1405** (16DI 24V DC 3.0ms) 16-channel digital input; 24 VDC; 3 ms; high-side switching.

From hardware version	02
From firmware version	--
Product detail page	🔗 www.wago.com/750-1405

Note

Note applicable documents!

The complete operating instructions for the product consists of several, applicable documents. The product must only be installed and operated in accordance with the complete operating instructions. Knowledge of all applicable documents is required for proper use. You can find all documents and information on the product detail page.

Applicable document

📄 System Manual I/O System 750/753

- Provisions
- Safety
- Planning
- Transport and Storage
- Assembly and Disassembly
- Conductor Termination
- Decommissioning

2 Overview

The I/O module acquires binary control signals from field devices (e.g., sensors, encoders, switches or proximity switches).

The I/O module has 16 input channels and directly connects to 1-wire sensors.

Each input channel has a noise-rejection RC filter with a 3.0 ms time constant.

The I/O module inputs provide high-side switching. If the 24 V potential for field power is switched to an input connection, the signal status for the corresponding input channel is set to "high."

For each channel, a green status LED indicates the signal status.

The field level and the system level are electrically isolated from one another.

The I/O module can be operated on all head stations of the WAGO I/O System 750/753.

3 Properties

3.1 View

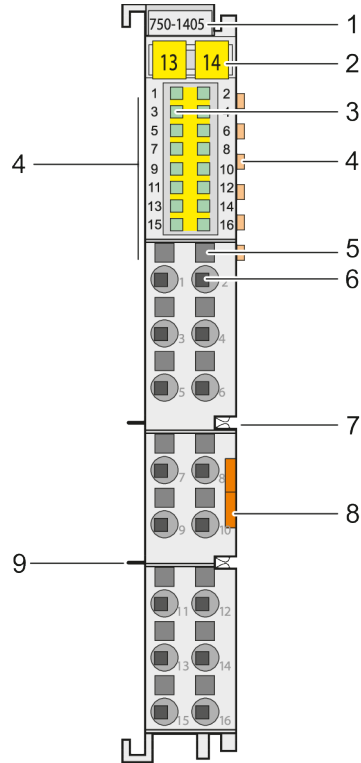


Figure 1: View

1	Item number	☞ Scope of Applicability [► 4]
2	Slot for Mini-WSB (optional)	☐ System Manual I/O System 750/753
3	Status LEDs	☞ Indicators [► 7]
4	Data contacts	☐ System Manual I/O System 750/753
5	Access to open the associated Push-in CAGE CLAMP® connection	☐ System Manual I/O System 750/753
6	Push-in CAGE CLAMP® connection	☞ Wiring Interface [► 8] and ☐ System Manual I/O System 750/753
7	Power jumper contacts (spring)	☞ Power Jumper Contacts [► 9] and ☐ System Manual I/O System 750/753
8	Release tab	☐ System Manual I/O System 750/753
9	Power jumper contacts (blade)	☞ Power Jumper Contacts [► 9] and ☐ System Manual I/O System 750/753

3.2 Indicators

For each channel, a green status LED indicates the signal status.




Figure 2: Indicators

Channel	Designation	LED	State	Function
1	DI 1 status	1	Off	DI 1 input: signal voltage (0)
			Green	DI 1 input: signal voltage (1)
2	DI 2 status	2	Off	DI 2 input: signal voltage (0)
			Green	DI 2 input: signal voltage (1)
3	DI 3 status	3	Off	DI 3 input: signal voltage (0)
			Green	DI 3 input: signal voltage (1)
4	DI 4 status	4	Off	DI 4 input: signal voltage (0)
			Green	DI 4 input: signal voltage (1)
5	DI 5 status	5	Off	DI 5 input: signal voltage (0)
			Green	DI 5 input: signal voltage (1)
6	DI 6 status	6	Off	DI 6 input: signal voltage (0)
			Green	DI 6 input: signal voltage (1)
7	DI 7 status	7	Off	DI 7 input: signal voltage (0)
			Green	DI 7 input: signal voltage (1)
8	DI 8 status	8	Off	DI 8 input: signal voltage (0)
			Green	DI 8 input: signal voltage (1)
9	DI 9 status	9	Off	DI 9 input: signal voltage (0)
			Green	DI 9 input: signal voltage (1)
10	DI 10 status	10	Off	DI 10 input: signal voltage (0)
			Green	DI 10 input: signal voltage (1)
11	DI 11 status	11	Off	DI 11 input: signal voltage (0)
			Green	DI 11 input: signal voltage (1)
12	DI 12 status	12	Off	DI 12 input: signal voltage (0)
			Green	DI 12 input: signal voltage (1)
13	DI 13 status	13	Off	DI 13 input: signal voltage (0)
			Green	DI 13 input: signal voltage (1)
14	DI 14 status	14	Off	DI 14 input: signal voltage (0)
			Green	DI 14 input: signal voltage (1)
15	DI 15 status	15	Off	DI 15 input: signal voltage (0)
			Green	DI 15 input: signal voltage (1)
16	DI 16 status	16	Off	DI 16 input: signal voltage (0)
			Green	DI 16 input: signal voltage (1)

3.3 Wiring Interface

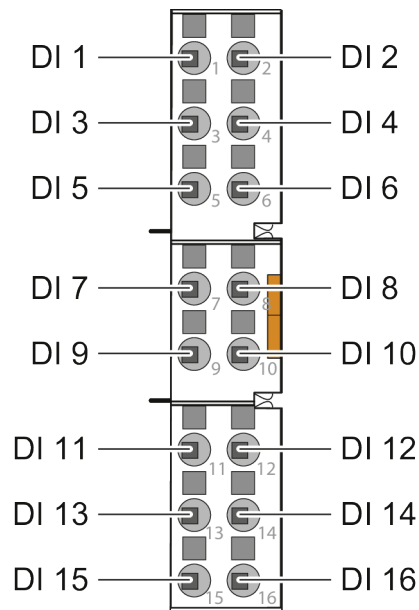


Figure 3: Push-in CAGE CLAMP[®] connections

Channel	Designation	Connection	Funktion
1	DI 1	1	DI 1 input: signal voltage
2	DI 2	2	DI 2 input: signal voltage
3	DI 3	3	DI 3 input: signal voltage
4	DI 4	4	DI 4 input: signal voltage
5	DI 5	5	DI 5 input: signal voltage
6	DI 6	6	DI 6 input: signal voltage
7	DI 7	7	DI 7 input: signal voltage
8	DI 8	8	DI 8 input: signal voltage
9	DI 9	9	DI 9 input: signal voltage
10	DI 10	10	DI 10 input: signal voltage
11	DI 11	11	DI 11 input: signal voltage
12	DI 12	12	DI 12 input: signal voltage
13	DI 13	13	DI 13 input: signal voltage
14	DI 14	14	DI 14 input: signal voltage
15	DI 15	15	DI 15 input: signal voltage
16	DI 16	16	DI 16 input: signal voltage

3.4 Power Jumper Contacts

The potential for the field supply is fed in via the blade contacts and passed on via the spring contacts.

For additional information on the Power Jumper Contacts, please see [System Manual I/O System 750/753](#).

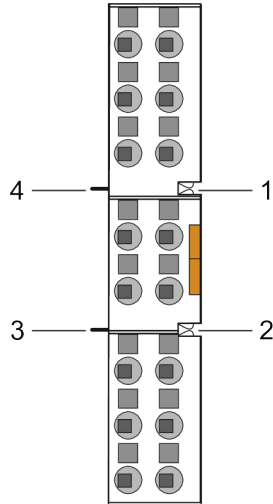


Figure 4: Power Jumper Contacts

No.	Type
1	Groove with spring contact
2	
3	Blade contact
4	

Arrangement in the Bus Node

For mechanical arrangement of the I/O module, the previous component must have at least 2 open grooves for accommodating the blade contacts.

For electrical compatibility requirements see Section [Circuit Diagram \[p. 10\]](#).

3.5 Circuit Diagram

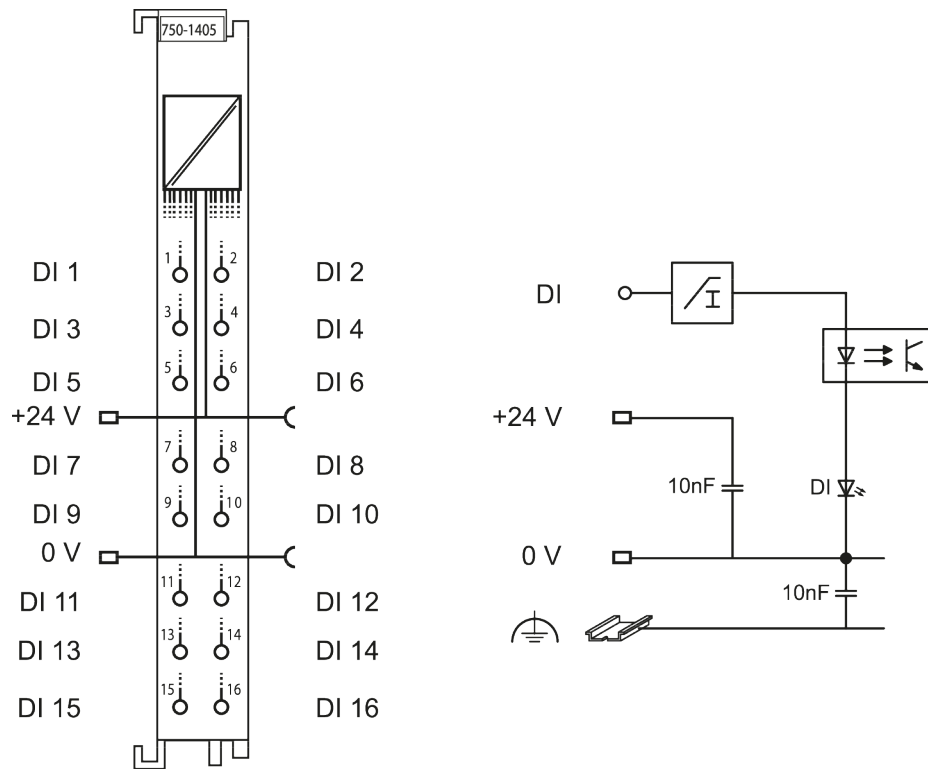


Figure 5: Circuit Diagram

For information on the system power supply, please see [System Manual I/O System 750/753](#).

4 Functions

4.1 Signal Processing

Each input channel has a noise-rejection RC filter with a 3.0 ms time constant.

The I/O module inputs provide high-side switching. If the 24 V potential for field power is switched to an input connection, the signal status for the corresponding input channel is set to "high."

4.2 Process Image

Table 1: Input bits 0 ... 7

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
DI 8	DI 7	DI 6	DI 5	DI 4	DI 3	DI 2	DI 1
DI 1	DI 1 signal status – digital input channel 1						
DI 2	DI 2 signal status – digital input channel 2						
DI 3	DI 3 signal status – digital input channel 3						
DI 4	DI 4 signal status – digital input channel 4						
DI 5	DI 5 signal status – digital input channel 5						
DI 6	DI 6 signal status – digital input channel 6						
DI 7	DI 7 signal status – digital input channel 7						
DI 8	DI 8 signal status – digital input channel 8						

Table 2: Input bits 8 ... 15

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
DI 16	DI 15	DI 14	DI 13	DI 12	DI 11	DI 10	DI 9
DI 9	DI 9 signal state – digital input channel 9						
DI 10	DI 10 signal state – digital input channel 10						
DI 11	DI 11 signal state – digital input channel 11						
DI 12	DI 12 signal state – digital input channel 12						
DI 13	DI 13 signal state – digital input channel 13						
DI 14	DI 14 signal state – digital input channel 14						
DI 15	DI 15 signal state – digital input channel 15						
DI 16	DI 16 signal state – digital input channel 16						

5 Planning

This section provides helpful information for planing the use of the product in a node.

5.1 Compatibility

The I/O module can be operated on all head stations of the WAGO I/O System 750/753.

5.2 Requirements for Wiring and Accessories

If applicable, use appropriate potential multiplication modules (e.g., item no. [750-1605](#), [750-1606](#) or [750-1607](#)) for the power supply to the sensors.

An operating tool with a 2.5 mm blade (e.g., item no. [210-719](#)) is required for opening the Push-in CAGE CLAMP® connections.

5.3 Connection Example

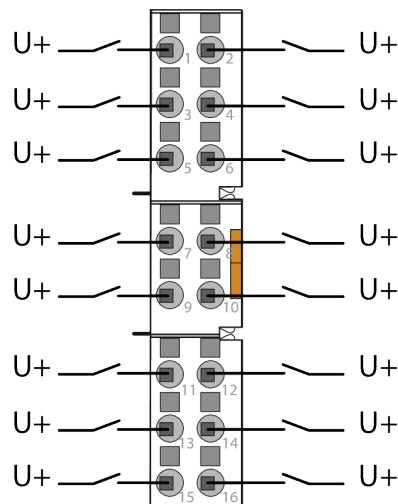


Figure 6: Example: 1-Wire Connection

6 Appendix


6.1 Technical Data, Approvals, Guidelines and Standards

Note

Subject to changes!

Please also observe the further product documentation! You can generate the current datasheet at any time at: www.wago.com /<item number>.

See also

-  Data sheet 750-1405 [► 14]



This digital input module features 16 channels in a width of just 12 mm (0.47 inch).
 It receives binary control signals from digital field devices (e.g., sensors, encoders, switches or proximity sensors).
 The module features Push-in CAGE CLAMP® connections enabling solid conductors to be connected by simply pushing them in.
 Each input channel has a noise-rejection RC filter with 3.0 ms time constant.
 A green LED indicates the signal state of each channel.
 Field and system levels are electrically isolated.
 An operating tool with a 2.5 mm blade (210-719) is required to open the Push-in CAGE CLAMP® connections.

Technical data

Number of digital inputs	16
Total number of channels (module)	16
Signal type	Digital
Signal type (voltage)	24 VDC
Sensor connection	16 x (1-wire)
Input characteristic	high-side switching
Input filter (digital)	3 ms
Input current per channel for signal (0) typ.	0.6 mA
Input current per channel for signal (1) typ.	2.3 mA
Input current per channel for signal (1) min.	2.1 mA
Input current per channel for signal (1) max.	2.4 mA
Voltage range for signal (0)	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC
Input data width (internal) max.	16 bits
Supply voltage (system)	5 VDC; via data contacts
Current consumption (5 V system supply)	25 mA
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission (field side supply voltage only) via spring contact)
Isolation	500 V system/field
Indicators	LED (1-16) green: Status DI 1 ... DI 16
Number of incoming power jumper contacts	2
Number of outgoing power jumper contacts	2
Current carrying capacity (power jumper contacts)	10 A

Connection data

Connection technology: inputs/outputs	16 x Push-in CAGE CLAMP® (inputs)
Connectable conductor materials	Copper
Connection type 1	Input
Solid conductor	0.08 ... 1.5 mm ² / 28 ... 16 AWG
Fine-stranded conductor	0.25 ... 1.5 mm ² / 22 ... 16 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	12 mm / 0.472 inches
Height	100 mm / 3.937 inches
Depth	69 mm / 2.717 inches
Depth from upper-edge of DIN-rail	61.8 mm / 2.433 inches

Mechanical data

Mounting type	DIN-35 rail
Pluggable connector	fixed

Material data

Color	light gray
Housing material	Polycarbonate; polyamide 6.6
Fire load	1.014 MJ
Weight	47 g
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	0 ... +55 °C
Ambient temperature (storage)	-40 ... +85 °C
Protection type	IP20
Pollution degree	2 per IEC 61131-2
Operating altitude	0 ... 2000 m / 0 ... 6562 ft
Mounting position	Horizontal left, horizontal right, horizontal top, horizontal bottom, vertical top and vertical bottom
Relative humidity (without condensation)	95 %
Vibration resistance	4g per IEC 60068-2-6
Shock resistance	15g per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2, marine applications
EMC emission of interference	per EN 61000-6-3, marine applications
Exposure to pollutants	per IEC 60068-2-42 and IEC 60068-2-43
Permissible H ₂ S contaminant concentration at a relative humidity 75 %	10 ppm
Permissible SO ₂ contaminant concentration at a relative humidity 75 %	25 ppm

Product classification

UNSPSC	32151705
--------	----------

Environmental Product Compliance

CAS-No.	1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(c)-I
SCIP notification number (Austria)	cbc4da15-2855-456e-b126-b3d1e41ded73
SCIP notification number (Belgium)	b2e6621d-45cb-4401-b769-cfd72228dc31
SCIP notification number (Bulgaria)	d6afedc8-cae1-44bb-becc-6c004301484f
SCIP notification number (Czech Republic)	7413ebf8-0a57-4ca7-b25f-da17e4d96a81
SCIP notification number (Denmark)	19f586a4-99ac-4888-a156-cc5324888c5f
SCIP notification number (Finland)	dccc2889-4b9e-4c99-9377-f629ac8cd83d
SCIP notification number (France)	e1b40844-f275-4dbd-a7d2-66e3bf0bee14
SCIP notification number (Germany)	cfaad3cd-7b39-4ba9-8975-b5e126d00a38

Environmental Product Compliance

SCIP notification number (Hungary)	1b458e07-dd90-4bc3-8d4f-80b8cc35f3cc
SCIP notification number (Italy)	fafda69e-2119-41a0-a0d1-1e72dd7b9694
SCIP notification number (Netherlands)	fb251372-8d08-459e-be3f-6f221cdde730
SCIP notification number (Poland)	7a5ee9a2-4e27-466e-a8ac-4a095c75f0f9
SCIP notification number (Romania)	f214c9e6-517a-4acc-8aae-acd6010dddc1
SCIP notification number (Sweden)	4e0950eb-efed-403d-aa8b-3df8f07043a2

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-DIM750
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Shipping	-	22-2219060
BSH Bundesamt fuer Seeschifffahrt und Hydrographie	-	1104
BV Bureau Veritas S.A.	-	30389/C0 BV
DNV DNV GL SE	DNV-CG-0339, Aug. 2021	TAA0000194
KR Korean Register of Shipping	-	KR HMB05880-AC001
LR Lloyds Register EMEA	-	LR22180952TA
PRS Polski Rejestr Statków	-	TE/1101/880590/23
RINA RINA Germany GmbH	-	ELE343521XG001

Approvals for hazardous areas



Approval	Standard	Certificate Name
ATEX TUEV Nord Cert GmbH	EN 60079-0	TUEV14ATEX148929X (II 3 G Ex ec IIC T4 Gc)
CCCEX CQST/CNEX	CNCA-C23-01	2020312310000213 (Ex ec IIC T4 Gc)
IECEX TUEV Nord Cert GmbH	IEC 60079-0	IECEX TUN 14.0035 X (Ex ec IIC T4 Gc)
INMETRO TUV Rheinland do Brasil Ltda.	IEC 60079-0	TUV 12.1297 X
UKEX WAGO GmbH & Co. KG	EN 60079-0	UKCA_WA GO22UKEX003X_ec
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	E198726

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com

List of Tables

Table 1	Input bits 0 ... 7.....	11
Table 2	Input bits 8 ... 15	11

List of Figures

Figure 1	View	6
Figure 2	Indicators	7
Figure 3	Push-in CAGE CLAMP® connections	8
Figure 4	Power Jumper Contacts	9
Figure 5	Circuit Diagram	10
Figure 6	Example: 1-Wire Connection.....	12

WAGO GmbH & Co. KG

Postfach 2880 · D - 32385 Minden
Hansastraße 27 · D - 32423 Minden

✉ info@wago.com
🌐 www.wago.com

Headquarters	+49 571/887 – 0
Sales	+49 (0) 571/887 – 44 222
Order Service	+49 (0) 571/887 – 44 333